

## Memory Cassette FX3U-FLROM-16/64/64L

### Hardware Manual

The FX3U-FLROM-16/64/64L memory cassette is a flash memory unit used as program memory for the FX3U/FX3UC PLC.

## 1. Specifications

✓: Applicable. Check for the version in parentheses.

Model name		FX3U-FLROM-16	FX3U-FLROM-64	FX3U-FLROM-64L
Applicable PLC	FX3U PLC	✓	✓	✓
	FX3UC PLC	✓(Ver.2.00 or later)	✓	✓(Ver.2.00 or later)
Max. memory capacity		16000 steps	64000 steps	64000 steps
Memory type		Flash memory		
Max. Allowable Write		10000 times		
PROTECT switch		Provided		
Data transfer button		NA	NA	Provided

## 2. Handling Cautions

- Power off the PLC before attaching/detaching the memory cassette.
- The PLC ERROR (ERR) LED may flicker to indicate a program error when using the product for the first time.  
In such a case, perform an "All Clear" operation or program transfer operation using a programming tool.

For further installation and PROTECT switch details, refer to the FX3U Series User's Manual - Hardware Edition of the respective PLC.




May 2005  
JY997D12801B



MITSUBISHI ELECTRIC CORPORATION  
Made in Japan

## 3. External Dimensions and Part Names

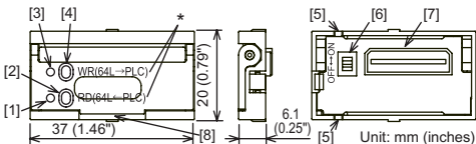

- |                          |                                       |
|--------------------------|---------------------------------------|
| [1] RD LED *             | [5] Prevent reverse installation slot |
| [2] RD (64L ← PLC) key * | [6] Write-protect switch              |
| [3] WR LED *             | [7] Main unit connector               |
| [4] WR (64L → PLC) key * | [8] Detachment lever                  |

\* Provided only in FX3U-FLROM-64L.

## 4. Applicable standard

FX3U-FLROM-16/64/64L complies with EC directive (EMC Directive). Further information can be found in the following manual.

However, FX3U-FLROM-64 made in June, 2005 or later complies with EC directive (EMC Directive). FX3UC-32 MT-LT does not comply with EC directive (EMC Directive).

→ **FX3U Series Hardware Manual (Manual No. JY997D18801)**